Model: 13HD7M

13 Inch Monitor Metal

This 13 inch Full HD monitor delivers best-in-class picture quality with excellent 178° viewing angles. The 13 inch monitor has a sturdy metal housing and is ideal for desktop, flush and wall mounting. The 13HD7M can be connected via HDMI, VGA, BNC or RCA connections.

- 1920 x 1080 resolution (Full HD)
- Input: HDMI, VGA, BNC, RCA
- Mounting: Flush, embedded, wall, desktop
- External dimensions: 317 x 200 x 35 mm

© 2024 Beetronics

beetronics

Beetronics
Bloemstraat 28
1016LC Amsterdam
Netherlands

Phone: +31 20 24 46 365
Fax: +31 20 70 08 369
E-mail: info@beetronics.eu
Web: www.beetronics.eu

General

Manufacturer	Beetronics
Item number	13HD7M
Previous model	13HDM
Product name	13 Inch Monitor Metal
Warranty	2 years
User Manual	Download PDF
Quickstart	Download PDF

Panel

Diagonal size	13.3 inches (339 mm)
Panel type	IPS-LCD
Aspect ratio	16:9 (4:3 adjustable)
Response time	10 ms
MTBF	50K
Native resolution	1920 x 1080
Supported resolutions	1920 x 1080 (max), 640 x 480 (min)
Pixels per inch	166 PPI
Backlight	LED
Brightness	300 cd/m2
Contrast	1400:1
Color encoding system	PAL/NTSC/SECAM
Viewing angle	178° horizontal, 178° vertical

© 2024 Beetronics

beetronics

Beetronics
Bloemstraat 28
1016LC Amsterdam
Netherlands

Phone: +31 20 24 46 365
Fax: +31 20 70 08 369
E-mail: info@beetronics.eu
Web: www.beetronics.eu

Connectivity

HDMI	1x
VGA	1x
BNC (CVBS)	1x
RCA video	1x
AUX input	1x
AUX output	1x
USB-A	1x integrated USB media player

Size & weight

Colour	Black
Weight	1600 grams (2000 grams with stand)
Width	317 mm
Height	201 mm
Thickness	36 mm
Display dimensions	295 x 166 mm

Features and functions

Audio	Integrated speakers
Key-lock	The control buttons can be blocked
Auto-on	Automatically powers on when it receives current or a signal
Dimmable	Adjustable backlight brightness
Mirroring	Image can be mirrored, horizontally and vertically
Orientation	Landscape, portrait, face-up
USB media player	The monitor is equipped with a built-in USB media player.

© 2024 Beetronics

beetronics

Beetronics
Bloemstraat 28
1016LC Amsterdam
Netherlands

Phone: +31 20 24 46 365
Fax: +31 20 70 08 369
E-mail: info@beetronics.eu
Web: www.beetronics.eu

Power

Input voltage	DC 9-33V
Consumption	Typical 11.2 W (on), 0.4 W (standby)
Power supply	External DC (power adapter included)
Power adapter	Input: AC100-240V, 50/60Hz , Output: 12V-2A
Power adapter output connector	DC barrel plug 2.1mm x 5.5mm

Environmental

Max. non-stop operating time	24/7
Operating temperature	-20°C to +60°C
Storage temperature	-20°C to +70°C
Operating humidity	20% - 90% non-condensing

Mounting

Wall mount	VESA (75 mm)
Flush mount	Mounting strips included
Stand	Adjustable and detachable

Certifications & Standards

Certifications	CE, FCC, RoHS, REACH, WEEE, IC, UKCA, e-Mark, EN50155, EN60601, CCC

Package content

Includes	Monitor, Stand, Remote control, Mounting strips, AC power adapter, Manual

© 2024 Beetronics

beetronics

Beetronics
Bloemstraat 28
1016LC Amsterdam
Netherlands

Phone: +31 20 24 46 365
Fax: +31 20 70 08 369
E-mail: info@beetronics.eu
Web: www.beetronics.eu

Compatible accessories

Dimmer	Compatible with external dimmer (DMK7/DMK8)
Rack mounting	Compatible with 19 inch rack mount kit (RMK2)
Wall mounting	Compatible with flat wall mount bracket (VWB1)
Stand	VDK4 included as standard

© 2024 Beetronics

beetronics

Beetronics
Bloemstraat 28
1016LC Amsterdam
Netherlands

Phone: +31 20 24 46 365
Fax: +31 20 70 08 369
E-mail: info@beetronics.eu
Web: www.beetronics.eu

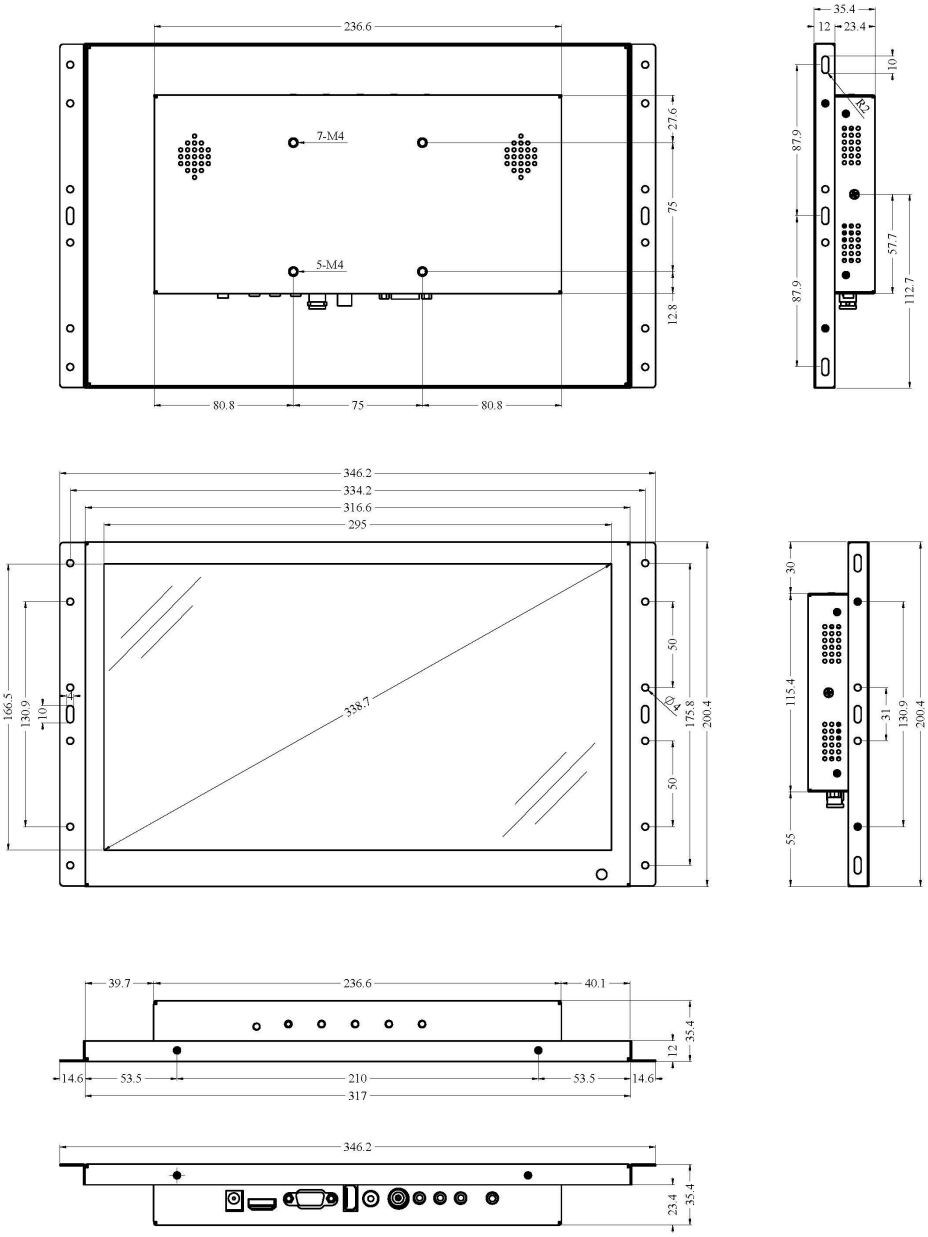

© 2024 Beetronics

beetronics

Beetronics
Bloemstraat 28
1016LC Amsterdam
Netherlands

Phone: +31 20 24 46 365
Fax: +31 20 70 08 369
E-mail: info@beetronics.eu
Web: www.beetronics.eu